


Threaded Caps

Protects threaded components from dust, moisture and damage during production, storage and transportation

prompt

MADE-TO-ORDER
VOLUME

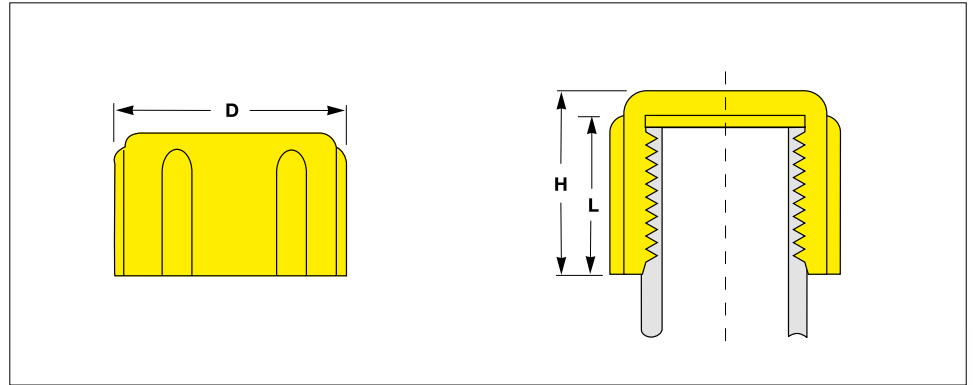

Pipe thread DIN ISO 6149-1

All dimensions in mm

Thread Size	D	L	H	Reference No.
G 1/8	12.9	8.5	9.6	EP 510 – G .1/8"
G 1/4	16.3	10.3	11.3	EP 510 – G .1/4"
G 3/8	20.5	13.1	14.1	EP 510 – G .3/8"
G 1/2	24.8	14.0	15.4	EP 510 – G .1/2"
G 5/8	28.0	14.0	15.2	EP 510 – G .5/8"
G 3/4	30.5	15.1	16.5	EP 510 – G .3/4"
G 1	39.0	18.0	19.5	EP 510 – G 1."
G 1 1/4	47.0	15.8	17.3	EP 510 – G 1.1/4"
G 1 1/2	56.5	16.7	18.7	EP 510 – G 1.1/2"
G 2	65.0	18.6	20.1	EP 510 – G 2."

Metric DIN 3852-1

All dimensions in mm

M 8 × 1	12.0	11.0	12.0	EP 510 – M 8 × 1
M 10 × 1	14.2	12.9	14.2	EP 510 – M 10 × 1
M 12 × 1	16.4	12.7	14.2	EP 510 – M 12 × 1
M 12 × 1.5	16.4	12.7	14.2	EP 510 – M 12 × 1.5
M 14 × 1.5	18.2	12.8	14.1	EP 510 – M 14 × 1.5
M 16 × 1.5	20.0	12.8	14.2	EP 510 – M 16 × 1.5
M 18 × 1.5	22.0	13.8	15.2	EP 510 – M 18 × 1.5
M 20 × 1.5	24.2	14.6	16.1	EP 510 – M 20 × 1.5
M 22 × 1.5	25.9	15.0	16.0	EP 510 – M 22 × 1.5
M 24 × 1.5	28.6	14.7	16.2	EP 510 – M 24 × 1.5
M 26 × 1.5	30.8	13.5	15.3	EP 510 – M 26 × 1.5
M 27 × 2	32.0	13.5	15.3	EP 510 – M 27 × 2
M 30 × 1.5	35.0	14.5	16.3	EP 510 – M 30 × 1.5
M 30 × 2	35.0	14.5	16.2	EP 510 – M 30 × 2
M 36 × 1.5	42.0	16.8	18.6	EP 510 – M 36 × 1.5
M 36 × 2	42.0	16.8	18.6	EP 510 – M 36 × 2
M 42 × 2	50.0	15.7	17.7	EP 510 – M 42 × 2
M 45 × 1.5	51.0	18.7	20.3	EP 510 – M 45 × 1.5
M 45 × 2	51.0	18.7	20.3	EP 510 – M 45 × 2
M 52 × 2	59.0	19.0	20.5	EP 510 – M 52 × 2

Material :
LD-PE,
low density polyethylene

Standard Colour :
yellow

Protects threaded components from dust, moisture and damage during production, storage and transportation

 sealwell

Should your requirements not be shown please ask for a separate quotation.

SEALWELL products and specifications are subject to improvement and change without notice.

Threaded Caps

Protects threaded components from dust, moisture and damage during production, storage and transportation

TRIPLE ADVANTAGE of CAPTOP®

QUALITY. Used throughout the automotive, fluid power and engineering industries. Protects threaded components from dust, moisture and damage during production, storage and transportation.

AVAILABILITY. With over 400 million moulded components shipped from our Oststeinbek / Hamburg logistics center we provide the fastest on time delivery service to all markets and industries.

PHILOSOPHY. Innovative protective closures at the best price in the market.



New Sizes:

M 8 × 1.25
M 10 × 1.5
M 12 × 1.75
M 14 × 2.0
M 16 × 2.5
M 18 × 2.0
M 24 × 2.0
M 27 × 1.5
M 28 × 1.5
M 33 × 1.5
M 33 × 2.0
M 48 × 2.0
1. 5/8 12 -UNF
1. 7/8 12 -UNF
2. 1/2 12 -UNF

UNF – UN / ISO 11926

All dimensions in mm

Thread Size	D	L	H	Reference No.
UN 3/ 8 – 24	13.6	11.3	12.5	EP 510 – . 3/ 8" – 24 UN
UN 7/16 – 20	15.6	11.9	13.3	EP 510 – . 7/16" – 20 UN
UN 1/ 2 – 20	17.0	14.1	15.3	EP 510 – . 1/ 2" – 20 UN
UN 9/16 – 18	18.7	12.5	13.9	EP 510 – . 9/16" – 18 UN
UN 5/ 8 – 18	20.3	18.0	19.4	EP 510 – . 5/ 8" – 18 UN
UN 3/ 4 – 16	23.6	17.6	19.2	EP 510 – . 3/ 4" – 16 UN
UN 11/16 – 16	21.2	10.5	11.8	EP 510 – .11/16" – 16 UN
UN 13/16 – 16	24.7	15.0	16.4	EP 510 – .13/16" – 16 UN
UN 7/ 8 – 14	27.0	19.5	21.2	EP 510 – . 7/ 8" – 14 UN
UN 1 – 14	30.0	16.1	17.3	EP 510 – 1. " – 14 UN
UN 1 1/16 – 12	31.7	20.1	21.7	EP 510 – 1. 1/16" – 12 UN
UN 1 3/16 – 12	35.0	21.1	22.7	EP 510 – 1. 3/16" – 12 UN
UN 1 5/16 – 12	39.3	21.1	22.9	EP 510 – 1. 5/16" – 12 UN
UN 1 7/16 – 12	44.0	21.0	22.8	EP 510 – 1. 7/16" – 12 UN

Should your requirements not be shown please ask for a separate quotation.
SEALWELL products and specifications are subject to improvement and change without notice.

Material :

LD-PE,
low density polyethylene

Standard Colour :

yellow

Individual Productions :

On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

 sealwell