


# Quick-Fit® Cable Glands, Nylon - with Spiral Flex Protector

The built-in bending protection offers improved and maximum protection for cables, flexible leads, hand tools and mobile machine parts to guarantee lasting operation

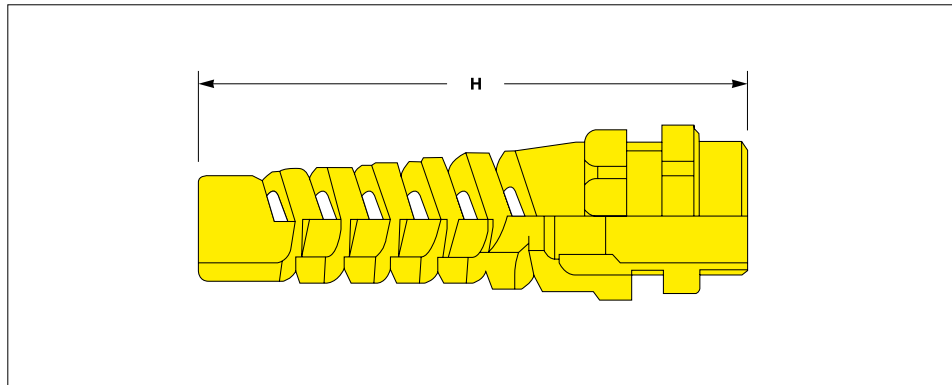

PG		Dark grey RAL 7001			All dimensions in mm	
Connecting Thread	Clamping-range	Length of thread	Spanner size	Lenght with flex	Reference-No.	
PG 7	3.0 – 6.5	8.0	SW 15	63.0	EPN 255 / PG 7	RAL 7001
PG 9	4.0 – 8.0	8.0	SW 19	74.6	EPN 255 / PG 9	RAL 7001
PG 11	5.0 – 10.0	8.0	SW 22	86.0	EPN 255 / PG 11	RAL 7001
PG 13.5	6.0 – 12.0	9.0	SW 24	98.0	EPN 255 / PG 13.5	RAL 7001
PG 16	10.0 – 14.0	10.0	SW 27	111.5	EPN 255 / PG 16	RAL 7001
PG 21	13.0 – 18.0	11.0	SW 33	129.0	EPN 255 / PG 21	RAL 7001

PG		Black RAL 9005			All dimensions in mm	
Connecting Thread	Clamping-range	Length of thread	Spanner size	Lenght with flex	Reference-No.	
PG 7	3.0 – 6.5	8.0	SW 15	62.8	EPN 255 / PG 7	RAL 9005
PG 9	4.0 – 8.0	8.0	SW 19	74.5	EPN 255 / PG 9	RAL 9005
PG 11	5.0 – 10.0	8.0	SW 22	86.0	EPN 255 / PG 11	RAL 9005
PG 13.5	6.0 – 12.0	9.0	SW 24	98.0	EPN 255 / PG 13.5	RAL 9005
PG 16	10.0 – 14.0	10.0	SW 27	111.5	EPN 255 / PG 16	RAL 9005
PG 21	13.0 – 18.0	11.0	SW 33	129.0	EPN 255 / PG 21	RAL 9005

Metric		Dark grey RAL 7001			All dimensions in mm	
Connecting Thread	Clamping-range	Length of thread	Spanner size	Lenght with flex	Reference-No.	
M 12x1.5	3.0 – 7.0	8.0	SW 15	62.0	EPN 255 / M 12x1.5	RAL 7001
M 16x1.5	5.0 – 10.0	15.0	SW 22	94.0	EPN 255 / M 16x1.5	RAL 7001
M 20x1.5	6.0 – 12.0	11.0	SW 24	100.0	EPN 255 / M 20x1.5	RAL 7001
M 20x1.5	10.0 – 14.0	11.0	SW 27	112.0	EPN 255 / M 20x1.5	RAL 7001
M 25x1.5	10.0 – 18.0	15.0	SW 33	131.5	EPN 255 / M 25x1.5	RAL 7001

Metric		Black RAL 9005			All dimensions in mm	
Connecting Thread	Clamping-range	Length of thread	Spanner size	Lenght with flex	Reference-No.	
M 12x1.5	3.0 – 7.0	8.0	SW 15	63.0	EPN 255 / M 12x1.5	RAL 9005
M 16x1.5	5.0 – 10.0	15.0	SW 22	94.0	EPN 255 / M 16x1.5	RAL 9005
M 20x1.5	6.0 – 12.0	9.0	SW 24	98.0	EPN 255 / M 20x1.5	RAL 9005
M 20x1.5	10.0 – 14.0	11.0	SW 27	112.0	EPN 255 / M 20x1.5	RAL 9005
M 25x1.5	10.0 – 18.0	15.0	SW 33	131.5	EPN 255 / M 25x1.5	RAL 9005

**Material :**  
PA 6,  
impact resistant nylon

**Standard Colours :**  
light grey RAL 7035  
dark grey RAL 7001  
black RAL 9005

**optional :**  
white RAL 9010  
red RAL 3000

Optional colours on request.

The built-in bending protection offers improved and maximum protection for cables, flexible leads, hand tools and mobile machine parts to guarantee lasting operation.



Should your requirements not be shown please ask for a separate quotation. SEALWELL products and specifications are subject to improvement and change without notice.

# Quick-Fit® Cable Glands, Nylon - with Spiral Flex Protector

The built-in bending protection offers improved and maximum protection for cables, flexible leads, hand tools and mobile machine parts to guarantee lasting operation

## TRIPLE ADVANTAGE of QUICK-FIT®

**QUALITY.** This is critical in cases involving flexible cable and leads to hand tools, mobile machine parts and in many other instances in the electrical appliance industry. The EPN 255 QUICK-FIT nylon Cable Glands with Spiral Flex Protector offer an improved level of safety against damaged cables and cores and in doing so guarantees lasting operation.

**AVAILABILITY.** With over 400 million moulded components shipped from our Oststeinbek / Hamburg logistics center we provide the fastest on time delivery service to all markets and industries.

**PHILOSOPHY.** The highest degree of Protec Quick-Fit functionality and safety at the best price in the market.



### Material :

PA 6,  
impact resistant nylon

### Standard Colours :

light grey	RAL 7035
dark grey	RAL 7001
black	RAL 9005

### optional :

white	RAL 9010
red	RAL 3000

Optional colours on request.

### Individual Productions :

On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

 sealwell