


# Quick-Fit® Thread Reducers

Nylon Reducers with large external thread and small internal thread

M → M

strong

FLEXIBLE PRODUCTION

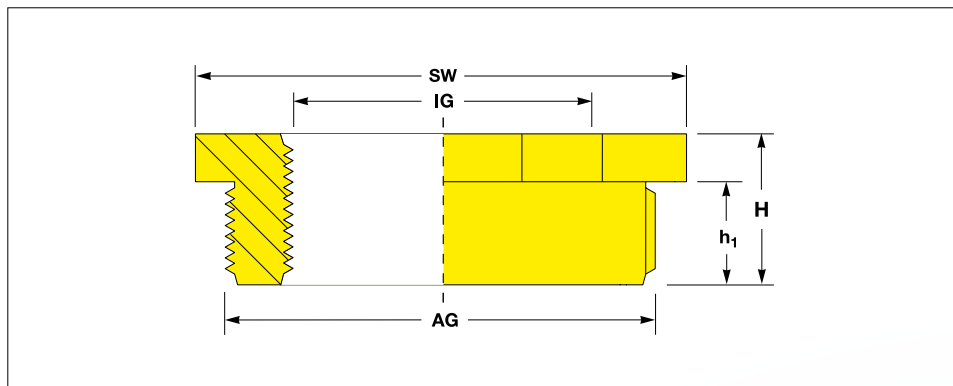

**Metric**

All dimensions in mm

| from            | to              |              |                       |
|-----------------|-----------------|--------------|-----------------------|
| Thread external | Thread internal | Spanner size | Reference-No.         |
| AG              | IG              | IG           |                       |
| M 16            | M 12            | SW 24        | EPN 550 / M 16 → M 12 |
| M 20            | M 12            | SW 24        | EPN 550 / M 20 → M 12 |
| M 20            | M 16            | SW 24        | EPN 550 / M 20 → M 16 |
| M 25            | M 12            | SW 32        | EPN 550 / M 25 → M 12 |
| M 25            | M 16            | SW 29        | EPN 550 / M 25 → M 16 |
| M 25            | M 20            | SW 29        | EPN 550 / M 25 → M 20 |
| M 32            | M 12            | SW 36        | EPN 550 / M 32 → M 12 |
| M 32            | M 16            | SW 36        | EPN 550 / M 32 → M 16 |
| M 32            | M 20            | SW 36        | EPN 550 / M 32 → M 20 |
| M 32            | M 25            | SW 36        | EPN 550 / M 32 → M 25 |
| M 40            | M 16            | SW 46        | EPN 550 / M 40 → M 16 |
| M 40            | M 20            | SW 46        | EPN 550 / M 40 → M 20 |
| M 40            | M 25            | SW 46        | EPN 550 / M 40 → M 25 |
| M 40            | M 32            | SW 46        | EPN 550 / M 40 → M 32 |
| M 50            | M 20            | SW 55        | EPN 550 / M 50 → M 20 |
| M 50            | M 25            | SW 55        | EPN 550 / M 50 → M 25 |
| M 50            | M 32            | SW 55        | EPN 550 / M 50 → M 32 |
| M 50            | M 40            | SW 55        | EPN 550 / M 50 → M 40 |
| M 63            | M 25            | SW 68        | EPN 550 / M 63 → M 25 |
| M 63            | M 32            | SW 68        | EPN 550 / M 63 → M 32 |
| M 63            | M 40            | SW 68        | EPN 550 / M 63 → M 40 |
| M 63            | M 50            | SW 68        | EPN 550 / M 63 → M 50 |

**Material :**  
PA 6,  
impact resistant nylon

**Standard Colour :**  
light grey RAL 7035

Nylon Reducers with large external thread and small internal thread



Should your requirements not be shown please ask for a separate quotation.  
SEALWELL products and specifications are subject to improvement and change without notice.

# Quick-Fit® Thread Reducers

**Nylon Reducers with large external thread and small internal thread**  
**PG → PG**

## TRIPLE ADVANTAGE of QUICK-FIT®

**QUALITY.** This component reduces the threaded entry diameter on any threaded connector from a larger to smaller thread size to accept a gland.

Configuration: from large external Metric to small Metric and from large external PG to small internal PG.

**AVAILABILITY.** With over 400 million moulded components shipped from our Oststeinbek / Hamburg logistics center we provide the fastest on time delivery service to all markets and industries.

**PHILOSOPHY.** The highest degree of Protec Quick-Fit functionality and safety at the best price in the market.



**PG**

| from            | to              | All dimensions in mm |                           |
|-----------------|-----------------|----------------------|---------------------------|
| Thread external | Thread internal | Spanner size         | Reference-No.             |
| AG              | IG              | IG                   |                           |
| PG 9            | PG 7            | SW 24                | EPN 550 / PG 9 → PG 7     |
| PG 11           | PG 7            | SW 22                | EPN 550 / PG 11 → PG 7    |
| PG 11           | PG 9            | SW 22                | EPN 550 / PG 11 → PG 9    |
| PG 13.5         | PG 7            | SW 24                | EPN 550 / PG 13.5 → PG 7  |
| PG 13.5         | PG 9            | SW 24                | EPN 550 / PG 13.5 → PG 9  |
| PG 13.5         | PG 11           | SW 27                | EPN 550 / PG 13.5 → PG 11 |
| PG 16           | PG 9            | SW 27                | EPN 550 / PG 16 → PG 9    |
| PG 16           | PG 11           | SW 27                | EPN 550 / PG 16 → PG 11   |
| PG 16           | PG 13.5         | SW 27                | EPN 550 / PG 16 → PG 13.5 |
| PG 21           | PG 11           | SW 32                | EPN 550 / PG 21 → PG 11   |
| PG 21           | PG 13.5         | SW 32                | EPN 550 / PG 21 → PG 13.5 |
| PG 21           | PG 16           | SW 32                | EPN 550 / PG 21 → PG 16   |
| PG 29           | PG 13.5         | SW 40                | EPN 550 / PG 29 → PG 13.5 |
| PG 29           | PG 16           | SW 40                | EPN 550 / PG 29 → PG 16   |
| PG 29           | PG 21           | SW 40                | EPN 550 / PG 29 → PG 21   |
| PG 36           | PG 16           | SW 60                | EPN 550 / PG 36 → PG 16   |
| PG 36           | PG 21           | SW 60                | EPN 550 / PG 36 → PG 21   |
| PG 36           | PG 29           | SW 50                | EPN 550 / PG 36 → PG 29   |
| PG 42           | PG 21           | SW 65                | EPN 550 / PG 42 → PG 21   |
| PG 42           | PG 29           | SW 65                | EPN 550 / PG 42 → PG 29   |
| PG 42           | PG 36           | SW 55                | EPN 550 / PG 42 → PG 36   |
| PG 48           | PG 29           | SW 70                | EPN 550 / PG 48 → PG 29   |
| PG 48           | PG 36           | SW 60                | EPN 550 / PG 48 → PG 36   |
| PG 48           | PG 42           | SW 70                | EPN 550 / PG 48 → PG 42   |

**Material :**  
 PA 6,  
 impact resistant nylon

**Standard Colour :**  
 light grey RAL 7035

**Individual Productions :**  
 On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.



Should your requirements not be shown please ask for a separate quotation.  
 SEALWELL products and specifications are subject to improvement and change without notice.