


# Quick-Fit® Thread Adapters

M → PG

PG → M

immediate

FREE SAMPLES

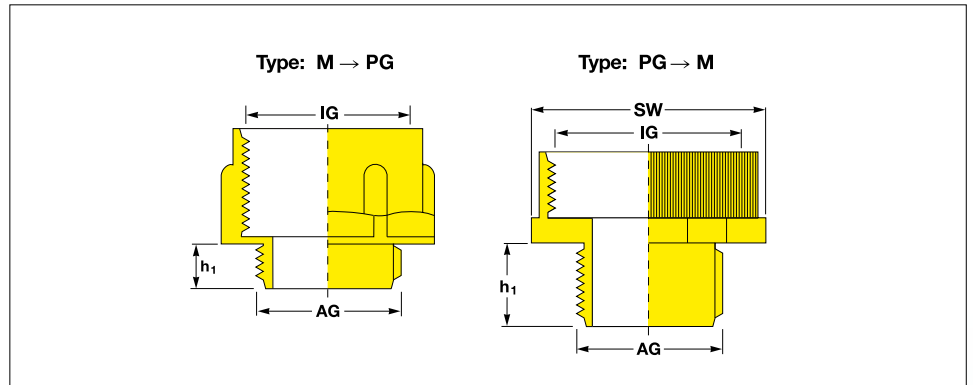

**Metric**

All dimensions in mm

from	to	Spanner size	Thread-size	Artikel-Nr.
Thread external	Thread internal			
AG	IG	IG	h <sub>1</sub>	
M 12	PG 9	SW 19	11.0	EPN 600 / M 12 → PG 9
M 16	PG 9	SW 19	11.0	EPN 600 / M 16 → PG 9
M 20	PG 11	SW 22	11.0	EPN 600 / M 20 → PG 11
M 20	PG 13.5	SW 24	11.0	EPN 600 / M 20 → PG 13.5
M 20	PG 16	SW 27	11.0	EPN 600 / M 20 → PG 16
M 25	PG 16	SW 27	11.0	EPN 600 / M 25 → PG 16
M 25	PG 21	SW 33	11.0	EPN 600 / M 25 → PG 21
M 32	PG 29	SW 42	11.0	EPN 600 / M 32 → PG 29
M 40	PG 29	SW 42	11.0	EPN 600 / M 40 → PG 29
M 50	PG 36	SW 53	11.0	EPN 600 / M 50 → PG 36
M 50	PG 42	SW 60	11.0	EPN 600 / M 50 → PG 42
M 63	PG 48	SW 65	11.0	EPN 600 / M 63 → PG 48

**PG**

All dimensions in mm

PG 7	M 12	SW 15	8.0	EPN 600 / PG 7 → M 12
PG 7	M 16	SW 20	8.0	EPN 600 / PG 7 → M 16
PG 9	M 12	SW 19	8.0	EPN 600 / PG 9 → M 12
PG 9	M 16	SW 20	8.0	EPN 600 / PG 9 → M 16
PG 9	M 20	SW 24	8.0	EPN 600 / PG 9 → M 20
PG 11	M 16	SW 22	8.0	EPN 600 / PG 11 → M 16
PG 11	M 20	SW 24	8.0	EPN 600 / PG 11 → M 20
PG 13.5	M 16	SW 24	9.0	EPN 600 / PG 13.5 → M 16
PG 13.5	M 20	SW 24	9.0	EPN 600 / PG 13.5 → M 20
PG 13.5	M 25	SW 30	9.0	EPN 600 / PG 13.5 → M 25
PG 16	M 20	SW 27	10.0	EPN 600 / PG 16 → M 20
PG 16	M 25	SW 30	10.0	EPN 600 / PG 16 → M 25
PG 21	M 25	SW 33	11.0	EPN 600 / PG 21 → M 25
PG 21	M 32	SW 37	11.0	EPN 600 / PG 21 → M 32
PG 29	M 32	SW 42	11.0	EPN 600 / PG 29 → M 32
PG 29	M 40	SW 45	11.0	EPN 600 / PG 29 → M 40

**Material :**  
PA 6,  
impact resistant nylon

**Standard Colour :**  
light grey RAL 7035

Nylon Adapters from metric external thread up to PG internal thread and from PG external thread up to metric internal thread.



Should your requirements not be shown please ask for a separate quotation.  
SEALWELL products and specifications are subject to improvement and change without notice.

# Quick-Fit® Thread Adapters

M → PG

PG → M

## TRIPLE ADVANTAGE of QUICK-FIT®

**QUALITY.** This component alters the threaded entry diameter on any threaded connector with incompatible thread forms.

Configuration: from small external Metric to large internal PG and from small external PG to large internal Metric.

**AVAILABILITY.** With over 400 million moulded components shipped from our Oststeinbek / Hamburg logistics center we provide the fastest on time delivery service to all markets and industries.

**PHILOSOPHY.** The highest degree of Protec Quick-Fit functionality and safety at the best price in the market.



**Material :**

PA 6,  
impact resistant nylon

**Standard Colour :**

light grey      RAL 7035

**Individual Productions :**

On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

 sealwell