## **EPN 650**


# **Quick-Fit® Thread Enlargers**

 $M \rightarrow M$ 

 $PG \rightarrow PG$ 





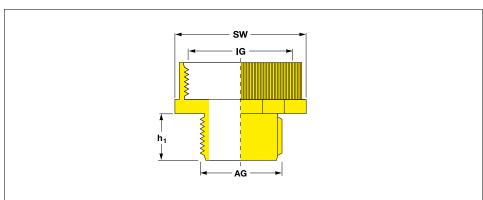



## Metric

from	to			All dimensions in mm
Thread external	Thread internal	Spanner size	Thread- size	Artikel-Nr.
AG	IG	IG	h <sub>1</sub>	
M 12	M 16	SW 20	8.0	EPN 650 / M 12 → M 16
M 16	M 20	SW 24	8.0	EPN 650 / M 16 → M 20
M 20	M 25	SW 30	8.0	EPN 650 / M 20 → M 25
M 25	M 32	SW 37	8.0	EPN 650 / M 25 → M 32
M 32	M 40	SW 45	10.0	EPN 650 / M 32 → M 40

#### Material:

PA 6,

impact restistant nylon

#### Standard Colour:

light grey

**RAL 7035** 

Nylon Enlargers with small external thread and large internal thread.



			All dimensions in mm
PG 9	SW 19	7.0	EPN 650 / PG 7 → PG 9
PG 11	SW 22	8.0	EPN 650 / PG 9 → PG 11
PG 13.5	SW 24	8.0	EPN 650 / PG 11 → PG 13.5
PG 16	SW 27	8.0	EPN 650 / PG 11 → PG 16
PG 16	SW 27	9.0	EPN 650 / PG 13.5 → PG 16
PG 21	SW 32	9.0	EPN 650 / PG 16 → PG 21
PG 29	SW 42	10.0	EPN 650 / PG 21 → PG 29
PG 36	SW 53	11.0	EPN 650 / PG 29 → PG 36
PG 42	SW 60	13.0	EPN 650 / PG 36 → PG 42
PG 48	SW 65	13.0	EPN 650 / PG 42 → PG 48
	PG 11 PG 13.5 PG 16 PG 16 PG 21 PG 29 PG 36 PG 42	PG 11 SW 22 PG 13.5 SW 24 PG 16 SW 27 PG 16 SW 27 PG 21 SW 32 PG 29 SW 42 PG 36 SW 53 PG 42 SW 60	PG 11         SW 22         8.0           PG 13.5         SW 24         8.0           PG 16         SW 27         8.0           PG 16         SW 27         9.0           PG 21         SW 32         9.0           PG 29         SW 42         10.0           PG 36         SW 53         11.0           PG 42         SW 60         13.0

Should your requirements not be shown please ask for a separate quotation. SEALWELL products and specifications are subject to improvement and change without notice.

# CUICK-FIT

## **Quick-Fit® Thread Enlargers**

 $M \rightarrow M$ 

 $PG \rightarrow PG$ 

## TRIPLE ADVANTAGE of QUICK-FIT

**QUALITY.** These components enlarge the threaded entry diameter on any threaded interface from a smaller to larger thread size in order to accept a suitable gland. Configuration: from small external Metric to large internal Metric and from small external PG to large internal PG.

**AVAILABILITY.** With over 400 million moulded components shipped from our Oststeinbek / Hamburg logistics center we provide the fastest on time delivery service to all markets and industries.

**PHILOSOPHY.** The highest degree of Protec Quick-Fit functionality and safety at the best price in the market.





## Material:

PA 6.

impact restistant nylon

#### Standard Colour:

light grey RAL 7035

## Individual Productions:

On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

