

PROTEC PROSICON® EPS 375

High Temp Silicone Push-Fit Plugs with Handle



YOUR PROSICON® PRODUCT ADVANTAGE. BEST PRICE PERFORMANCE IN THE MARKET.

HIGH TEMP SILICONE PUSH-FIT PLUGS WITH HANDLE.

Silicone Hollow Plugs with handles are designed to plug plain and threaded holes; they will mask off the hole and allow finishing up to it.

Central pull tab for easy and quick insertion and removal.

Hollow to make it lighter and more conforming.

Tapered to fit into a range of hole sizes.

Recommended for Powder coating, e-coating, plating & anodizing.

PREMIUM SILICONE MATERIAL PROPERTIES.

Prosicon® Silicone rubber 55 shore A withstands temperatures up to max. 316° C / 4 hours. On request also in EPDM material up to max. 177° C available.

PROSICON® BLU SIGNATURE® PRODUCT CODE.

Premium. Reusable. Stabilized with Special Blends.

COLOR OPTIONS.

Special color runs available on request.

TECHNICAL CLEANLINESS FOR ACCURATE MASKING.

Prosicon® Silicone Maskign Caps and Plugs are stabilized and tempered separately. This process improves dimensional stability and prevents plasticizer exudation during customer applications under high temperature conditions.

PREMIUM SILICONE MATERIAL PROPERTIES.

Prosicon® Silicone Maskign Caps and Plugs have an excellent resistance to high temperature, chemicals and acids and can be used several times without loss of quality.

HEAT RESISTANT!

MATERIALS SELECTION GUIDE.

EPDM rubber, Neoprene, NBR rubber, SBR, TPE, ecc.

APPLICATION.

High Temperature Masking Caps and Plugs to protect your product during finishing processes like powder coating, KTL, Wet painting, anodizing, electroplating and e.coating treatments. Extremely temperature resistant up to 316° C, robust, versatile and time-saving in application.

SILICONE / EPDM CUSTOM DESIGN AT RECORD SPEED.

On request we develop and produce individually tailored solutions along with the standard items of this range: If you require additional dimensions, different materials and new colours. We would be pleased to assist you.

Customized. For your special application


Time Saver. Rapid Prototyping & Hi-Speed functional samples

Hi-Speed. Fast Lane Serial Mold Construction

Unbeatable. At the best price in the market

PROTEC PROSICON® EPS 375

High Temp Silicone Push-Fit Plugs with Handle

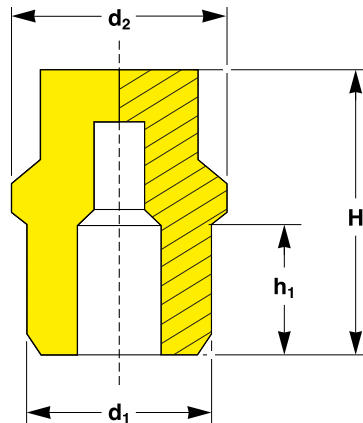

DIMENSIONS

All dimensions in mm

Dimensions					Shore A	Standard Pack	Reference No.
d ₁	d ₂	h ₁	H	Metric			
2.70	3.50	5.30	20.80	M 3	55	1.000	EPS 375 / 0107
3.60	4.10	5.80	21.80	M 4	55	1.000	EPS 375 / 0141
4.50	5.30	5.60	20.80	M 5	55	1.000	EPS 375 / 0178
5.20	6.20	4.30	14.00		55	1.000	EPS 375 / 0205
5.30	6.30	7.50	24.50		55	500	EPS 375 / 0208
5.30	6.40	5.10	14.50		55	500	EPS 375 / 0210
5.50	6.60	5.10	11.40	M 6	55	500	EPS 375 / 0218
5.50	6.60	7.10	23.40		55	500	EPS 375 / 0218L
6.80	9.00	14.50	32.30		55	500	EPS 375 / 0268
7.10	8.10	5.10	12.70	M 8	55	500	EPS 375 / 0278
7.10	8.10	7.10	22.70	M 8	55	500	EPS 375 / 0278L
7.20	8.60	4.20	12.00		55	500	EPS 375 / 0283S
7.20	8.50	5.10	14.90		55	500	EPS 375 / 0283
7.20	8.40	7.50	22.80		55	500	EPS 375 / 0283L
8.50	9.80	6.40	15.20		55	500	EPS 375 / 0336
8.50	9.80	8.40	25.30		55	500	EPS 375 / 0336L
9.00	10.20	6.20	17.50		55	250	EPS 375 / 0354
9.10	10.40	6.10	15.60	M 10	55	250	EPS 375 / 0358
9.10	10.40	7.00	24.00	M 10	55	250	EPS 375 / 0358L
10.00	11.40	8.90	19.10		55	250	EPS 375 / 0394
10.80	12.40	8.80	20.00	M 12	55	250	EPS 375 / 0426
11.00	12.20	8.20	20.30		55	250	EPS 375 / 0433
11.50	13.00	8.90	19.10		55	250	EPS 375 / 0451
12.10	14.00	7.60	22.00		55	250	EPS 375 / 0477
13.00	14.00	7.60	22.20	M 14	55	250	EPS 375 / 0510
14.80	17.00	10.40	23.00	M 16	55	100	EPS 375 / 0583
14.90	16.60	10.30	23.00		55	100	EPS 375 / 0587
16.30	18.60	9.50	32.60	M 18	55	100	EPS 375 / 0643
18.40	20.30	12.30	28.70		55	100	EPS 375 / 0724S
18.40	20.60	13.00	28.60	M 20	55	100	EPS 375 / 0724
18.70	20.50	23.00	39.00		55	100	EPS 375 / 0736
21.00	23.20	9.50	32.60	M 22	55	100	EPS 375 / 0825
21.30	23.90	13.60	33.10	M 24	55	100	EPS 375 / 0840
22.80	24.10	16.00	37.90		55	100	EPS 375 / 0896

Should your requirements not be shown please ask for a separate quotation.
SEALWELL products and specifications are subject to improvement and change without notice.