

# PROTEC PROSICON® EPS 855

## Heat-resistant Silicone square Foam Cords



**YOUR PROSICON® PRODUCT ADVANTAGE. BEST PRICE PERFORMANCE IN THE MARKET.**

### HEAT-RESISTANT SILICONE SQUARE FOAM CORDS.

Ideal for applications that are exposed to extreme temperatures (-40 ° C to + 200 ° C).

Our silicone rectangular foam cords are also characterized by excellent ozone and radiation resistance, UV resistance as well as arc and corona resistance.

Closed-cell.

These properties are well preserved at high and low temperatures.

### PREMIUM SILICONE MATERIAL PROPERTIES.

Prosicon® Silicone Foam withstands temperatures between -40° C and max. +200° C.

### PROSICON® BLU SIGNATURE® PRODUCT CODE.

Premium. Reusable. Stabilized with Special Blends.

### COLOR OPTIONS.

Special color runs available on request.

### TECHNICAL CLEANLINESS FOR ACCURATE MASKING.

Prosicon® Silicone Maskign Caps and Plugs are stabilized and tempered separately. This process improves dimensional stability and prevents plasticizer exudation during customer applications under high temperature conditions.

### PREMIUM SILICONE MATERIAL PROPERTIES.

Prosicon® Silicone Maskign Caps and Plugs have an excellent resistance to high temperature, chemicals and acids and can be used several times without loss of quality.

**HEAT RESISTANT!**

### TECHNICAL PROPERTIES.

Density (specific weight):  $250 \pm 40 \text{ Rg} / \text{m}^3$   
Shore hardness:  $45 \pm 5$  (country ,00') <5 (Country ,A')  
Tensile strength  $0.75 \text{ N} / \text{mm}^2$   
Tensile strength Elongation at break: 100%  
Min. Temperature: -40 ° C  
Max. Temperature: + 200 ° C  
Compression set (22h at 70 ° C): 15%.

Suitable for food applications and physiologically harmless.


### SILICONE / EPDM CUSTOM DESIGN AT RECORD SPEED.

On request we develop and produce individually tailored solutions along with the standard items of this range: If you require additional dimensions, different materials and new colours. We would be pleased to assist you.

**Customized.** For your special application  
**Time Saver.** Rapid Prototyping & Hi-Speed functional samples  
**Hi-Speed.** Fast Lane Serial Mold Construction  
**Unbeatable.** At the best price in the market

# PROTEC PROSICON® EPS 855

## Heat-resistant Silicone square Foam Cords

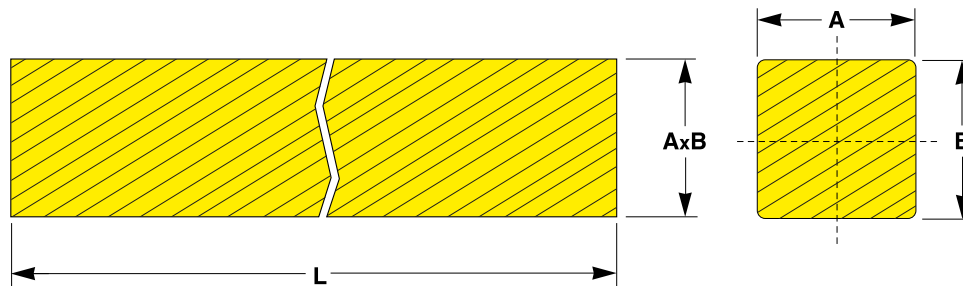

### DIMENSIONS

All dimensions in mm

Dimensions		Type	Reference No.
A x B	L (Metre)		
10 x 10	25.00	Metric	EPS 855 / 10x10
12 x 12	25.00	Metric	EPS 855 / 12x12
20 x 20	25.00	Metric	EPS 855 / 20x20

Should your requirements not be shown please ask for a separate quotation.  
SEALWELL products and specifications are subject to improvement and change without notice.